


Roth Touchline® SL Controller 4 ch, WiFi

Roth Touchline® SL Controller 4 ch, WiFi

The Roth Touchline® SL Controller 4 ch, WiFi is a stand-alone controller meaning it's for smaller installations and can not be connected to extension modules for more channels. The controller can be used for regulation of floor heating in up to 4 rooms. In addition to this 4 rooms with radiators can be controlled using Roth Touchline® SL Wireless Radiator actuators.

The Roth Touchline® SL Controller 4 ch, WiFi is available with 4 channels. The controller can be mounted directly on the wall, or by using a 35 mm DIN rail (included). The controller has a potential-free relay for e.g. boiler control, an output for pump with 230V voltage, as well as in/output for e.g., heat sources. The controller has built-in WiFi and can be used with the Roth Touchline® SL app.

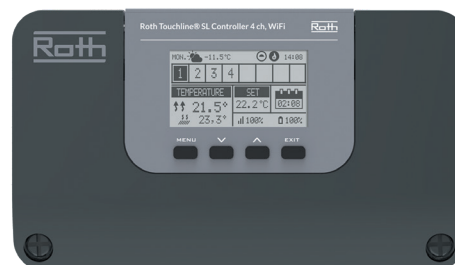

Technical data

Roth Touchline® SL Controller 4 ch, WiFi, 230V	HVAC no. 7466397074
Supply voltage	230V AC
Energy consumption	6 W
Number of outputs and voltage	6 (NC/NO), 230V AC
Max. sustained load	Max. 12 actuators (0.3A) (4 actuators in output 1 and 2, and 2 actuators in output 3 and 4.
Wireless channels floor heating	4 thermostat/sensors
Wireless channels radiator actuators	4 thermostat/sensors (max. 6 actuators per zone)
Protection class I	6 window contacts (per zone)
Transmission frequency	(EN60730)
Range (up to)	868 MHz
Max. load pump relay	30 m (in ordinary building)
Max. load potential-free relay	230V and 0.5 A
Power supply cable	1A
Ambient temperature	85 cm
Ambient humidity	5 - 50°C
Storage/transport temperature	< 80% RH
Degree of protection	-20 - +50°C
Fuse glass fuse	IP20 (EN60529)
Approvals	WT 3.15A (5 x 20 mm) CE 2014/53/EU

